


HKS simply click XL 14 mm, oak

Type/Construction	1 strip plank in 2 layer construction, approx. 3 mm top layer oak on high quality plywood
Dimensions	14/3 x 220 mm
Lengths	random lengths 400 – 2.200 mm, system-packaging to length of 2.200 mm; 5 layers per bundle, 4 full lengths, only 1 layer broken (4-1-0).
Packaging	shrinking foil, carton simply click XL, 1 bundle = 2,42 m ² , 1 pallet 30 bundles or 87,12 m ²
Profile	Unilin click system (drop down), beveled (GO4)
Surfaces	natural oiled (UV), white oiled (UV), antique grey (hardwax-oil), vintage cream (hardwax-oil), black smoke (hardwax-oil)
Production	according EN 13489
Grading*	<p>ABCD grade - according to the quality description of the manufacturer.</p> <p>Inside this grades it is allowed:</p> <ul style="list-style-type: none"> - midsize and big knots if necessary filled - light dark discolouration - natural wood structure and colour related to growth - sapwood
Installation	glueing down on concrete or floating installation on suitable footstep sound insulation; always according to the instructions of the manufacturer (glue, Elastilon, etc.)
Maintenance	depending on use with suitable maintenance products
Underfloor heating	only with glueing down installation, only with warm water system, no electric heating systems, surface temperature max. 25° C with equal heating, heat conductivity 0,17 W (m k); thermal resistance 0,082 m ² K/W
Fire resistance	Dfl-s1
Labelling	CE
Hints	Wooden floorings are a natural product, due to climate conditions joints can occur in winter and the planks can swell in summer. Therefore an expansion gap to the walls of min. 15 mm is necessary. According to the behaviour of the planks the customer must be advised.

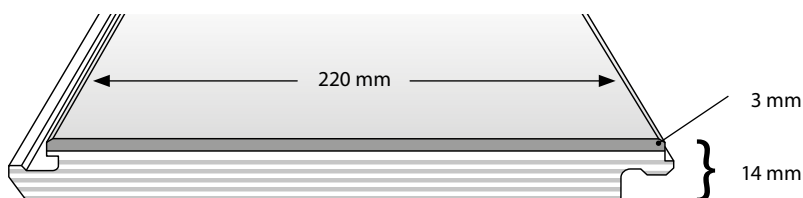

*According to the factory standard, 3% clause to EN standard, max. 3% of the complete delivery including the cutting differences can differ from the grading description. The material must be checked before installation, claims after the installation are impossible.