


HKS solid wood flooring

Type/Construction	1 strip plank solid
Dimensions	thickness 15 – 21 mm, width 120 – 200 mm; other dimensions on demand
Lengths	random lengths 500+ mm or fix length on demand
Packaging	shrinking foil, HKS Carton, maintenance and installing instructions included
Profile	all around tongue and groove, beveled (GO4)
Surfaces	for example: unfinished, natural oiled, white oiled, coloured oil, smoked or brushed; HKS offers many possibilities
Production	referring to EN 13629 hardwood (June 2012) and 13990 conifer wood
Grading*	natur, markant, rustical - according to the quality description of the manufacturer depending on the type of wood
Installation	glueing down on concrete or floating installation on Elastilon; always according to the instructions of the manufacturer (glue, Elastilon, etc.) Screwing on beams or particleboard flooring from (19 mm thickness)
Maintenance	depending on use with suitable HKS maintenance products
Underfloor heating	Suitable up to 180 mm width, only with warm water system, no electric heating systems, surface temperature max. 29° C with equal heating. Attention: Not all types of wood are suitable, for example beech is absolutely not suitable. Please ask if it is possible before you buy. Heat conductivity and thermal resistance depend on thickness and type of wood.
Fire resistance	C _{fi} -s1
Labelling	CE, as an option PEFC/FSC
Hints	Wooden floorings are a natural product, due to climate conditions joints can occur in winter and the planks can swell in summer. Therefore an expansion gap to the walls of min. 15 mm is necessary. According to the behaviour of the planks the customer must be advised.

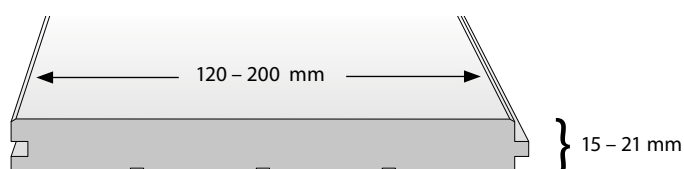

*According to the factory standard, 3% clause to EN standard, max. 3% of the complete delivery including the cutting differences can differ from the grading description. The material must be checked before installation, claims after the installation are impossible.