


HKS classique 14/3 x 190 mm, oak

Type/ Construction	1-strip plank in 3-layer construction, approx. 3 mm oak toplayer, based on 9 mm poplar / pine, counter-sheet 2 mm poplar
Dimensions	14/3 x 190 x 1.900 mm
Packaging	8 layers per bundle, 7 full lengths, 1 broken layer, shrinking foil, HKS classique box, 1 box = 2,888 m ² , 1 Pal. = 40 boxes / 115,52 m ²
Profile	tongue and groove (T+G) all around, 4 sides microbevel (GO4)
Finishes	natural oiled, white oiled, invisible-look oiled / further finishes on request sanded or light brushed
Production	according to EN 13489
Grading	Markant* , according to the description of the factory this grading allows the following characteristics: - mid-sized and bigger knots, filled if needed - partwise darker colour variation with brown-cores or sapwood - natural vivid wooden structure and colour
Installation	Glueing down on concrete or floating installation on suitable underfloor mat (e.g. Elastilon). Always according to the instructions of the manufacturer (adhesive, underlay, glue).
Maintenance	with suitable maintenance products (depending on use)
Underfloor heating	only with warm water system, no electric heating systems, surface temperature max. 29°C with equal heating, heat conductivity 0,14 W(m K)
Fire resistance	D _{fl} -s1
Labelling	CE
Hints	wooden floorings are a natural product, due to climate conditions joints can occur in winter and the planks can swell in summer. Therefore, an expansion gap to the walls of min. 15 mm is necessary. According to the behaviour of the planks the customer must be advised.

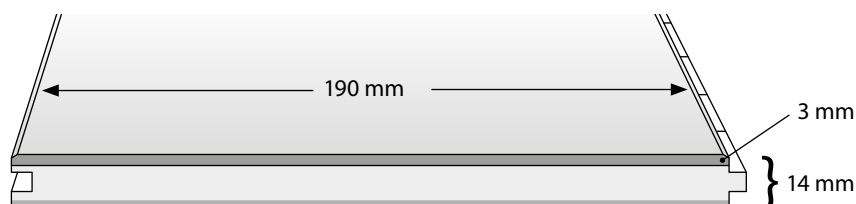

*according to the factory standard, 3% clause to EN standard, max. 3% of the complete delivery including the cutting differences can differ from the grading description. The material must be checked before installation, claims after the installation are impossible.